

PARTS LIST				
ITEM	QTY	PART NUMBER	DESCRIPTION	STOCK NUMBER
1	2	TB-200-707	845 X 145 X 45	COMTIMSAW0005
2	1	TB-200-248	1088 X 145 X 45	COMTIMSAW0005
3	1	TB-200-894	1950 X 145 X 70	COMTIMSAW0003
4	5	TB-200-895	888 X 120 X 33	COMTIMSAW0017
5	5	TB-200-896	748 X 45 X 45	COMTIMSAW0007
6	1	TB-200-934	1950 X 145 X 70	COMTIMSAW0003
7	1	RS-100-070	CLIMBING ROPE	COMNETROP0002
8	1	PE-400-140	1900 X 888 TREADSAFE DECK	COMPOL0018
9	2	U-SHAPE POST FOOT	POST FOOT	COMSTEMIS0026
10	12	M4 X 50 TORX WOODSCREW	M4 X 50 TORX WOODSCREW	COMA2WS4X50
11	25	M4 X 70 TORX WOODSCREW	M4 X 70 TORX WOODSCREW	COMA2WS4X70
12	6	M8 X 50 TORX WASHER HEAD	50MM WASHER SCREW	COMA2WH8X50
13	8	M8 X 70 TORX WASHER HEAD	70MM WASHER SCREW	COMA2WH8X70
14	4	M8 X 80 TORX WASHER HEAD	80MM WASHER SCREW	COMA2WH8X80
15	4	M8 X 100 TORX WASHER HEAD	100MM WASHER HEAD	COMA2WH8X100
16	8	30MM BOLT COVER	30MM BLACK CAP	COMPLACAP0001
17	2	300 x 300 x 200	0.018M³ CONCRETE FOUNDATION	

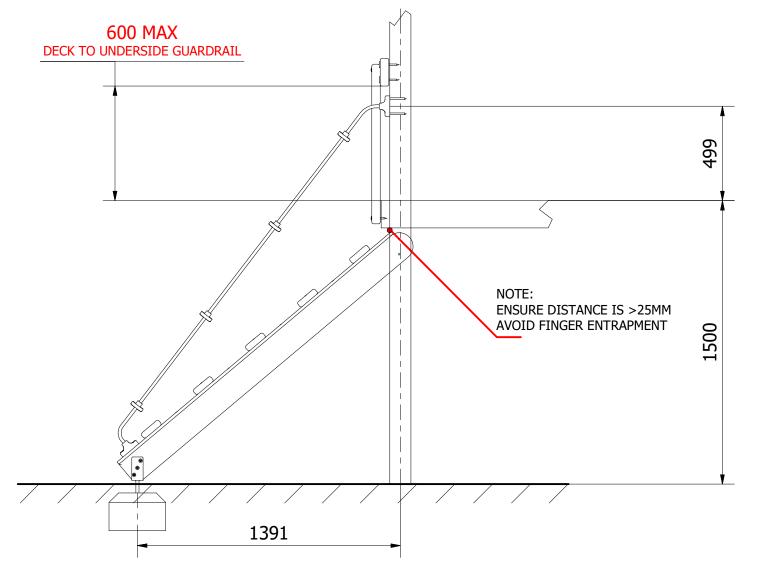

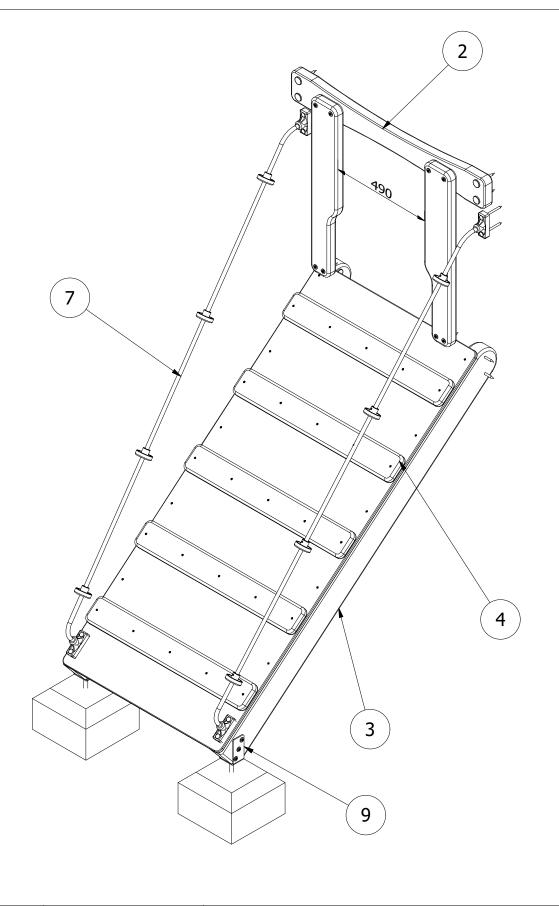

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS TOLERANCES:

LINEAR: ±2MM 1 DECIMAL PLACE: ±0.5MM ANGULAR: ±1°

O P online playgrounds

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FENLAND LEISURE PRODUCTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FENLAND LEISURE PRODUCTS IS PROHIBITED.

MOD-600-132 1.5M ORCHARD RAMP

Date:

Page: 1

21/09/2021

А3

Product Range: MODULE DRAWING


REV:B

':B

DO NOT SCALE FROM DRAWING


Tel: 01354 638359 www.onlineplaygrounds.co.uk

 SECURE THE TREADSAFE DECK TO THE TIMBER SIDE SUPPORTS (ITEM 2). AS SHOWN BELOW SECURE THE TREADS TO THE TOP AND THE SUPPORT ON THE UNDERSIDE USING THE SUPPLIED FIXINGS.

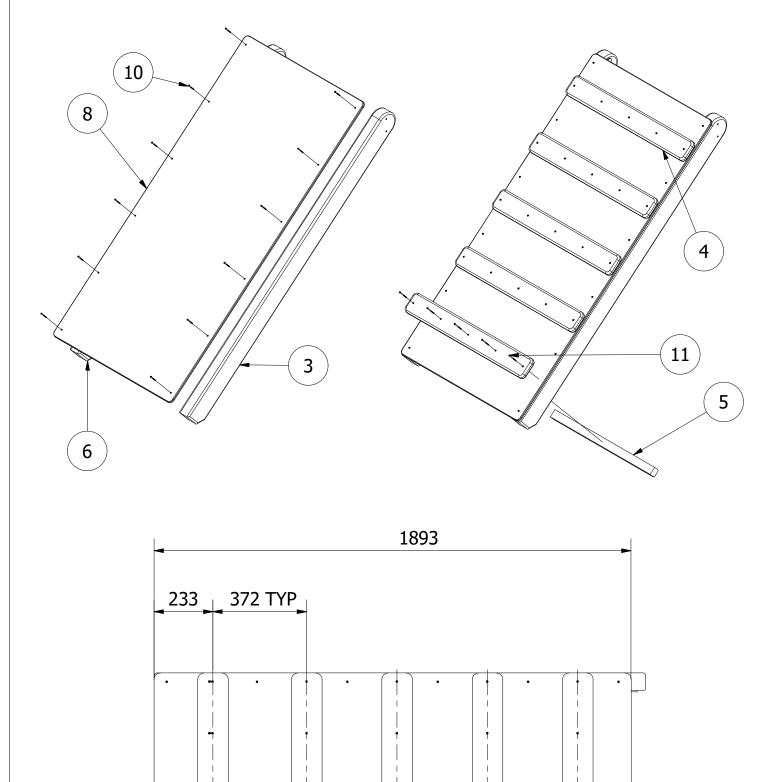

NOTE:
TO REDUCE THE RISK OF STEEL GALLING, USE LUBRICANT ON ALL STAINLESS STEEL FIXINGS

2. SECURE THE POST ANCHOR ON THE BOTTOM OF THE SIDE SUPPORT (ITEM 2). POSITION THE RAMP IN THE FOUNDATION HOLES AND ON THE INSIDES OF THE TOWER UPRIGHT POSTS ON THE UNDERSIDE OF THE DECK. SECURE IN PLACE USING THE SUPPLIED FIXINGS.

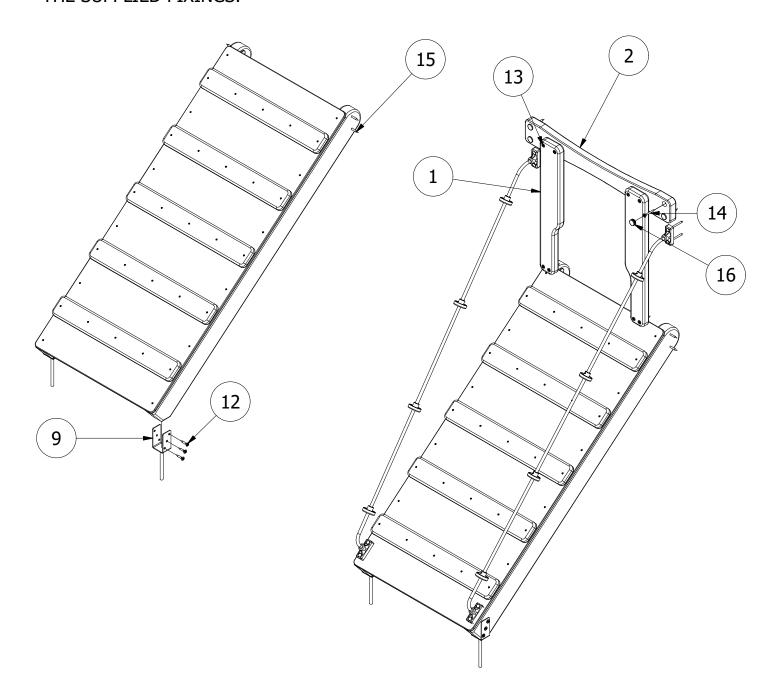

4. FINALLY, ENSURE UNIT IS LEVEL AND PLUMB, ALL FIXINGS HAVE BEEN TIGHTENED AND PROTECTIVE CAPS IN PLACE. ADD CONCRETE TO EACH FOUNDATION HOLE AND LEAVE FOR 48 HOURS

