
| | PARTS LIST | | | | | | |
|------|------------|-------------|---------------|-------------------------------|--|--|--|
| ITEM | QTY | PART NUMBER | STOCK NUMBER | DESCRIPTION | | | |
| 1 | 2 | MOD-600-189 | | POST WITH POST FEET | | | |
| 2 | 1 | PE-400-059 | COMPOL0043 | Black/ White/ Black HDPE 19mm | | | |
| 3 | 1 | | COMPLACAP0027 | 2 PART CAP (YELLOW) | | | |
| 4 | 1 | | COMPLACAP0035 | 2 PART CAP (BLUE) | | | |
| 5 | 1 | | COMPLACAP0033 | 2 PART CAP (GREEN) | | | |
| 6 | 1 | | COMPLACAP0009 | 2 PART CAP (RED) | | | |
| 7 | 4 | | COMA2WH8X80 | M8 X 80 TORX WASHER HEAD | | | |

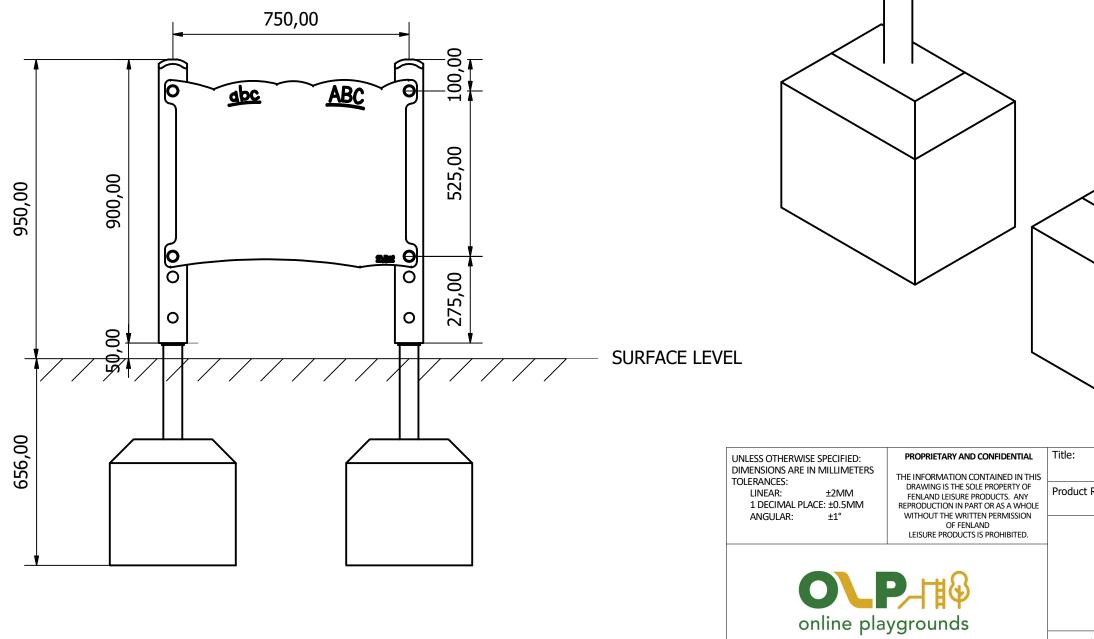


6


5

apc

| 2 | |
|---------------------------|------------------------------|
| | |
| 4 | |
| | |
| | |
| e: PPO-500.079 | |
| duct Range: PLAY PANELS | |
| PLAT FAINELS | Date: 24/03/2022 Page: |
| DO NOT SCALE FROM DRAWING | A3 |

Tel: 01354 638359 www.onlineplaygrounds.co.uk

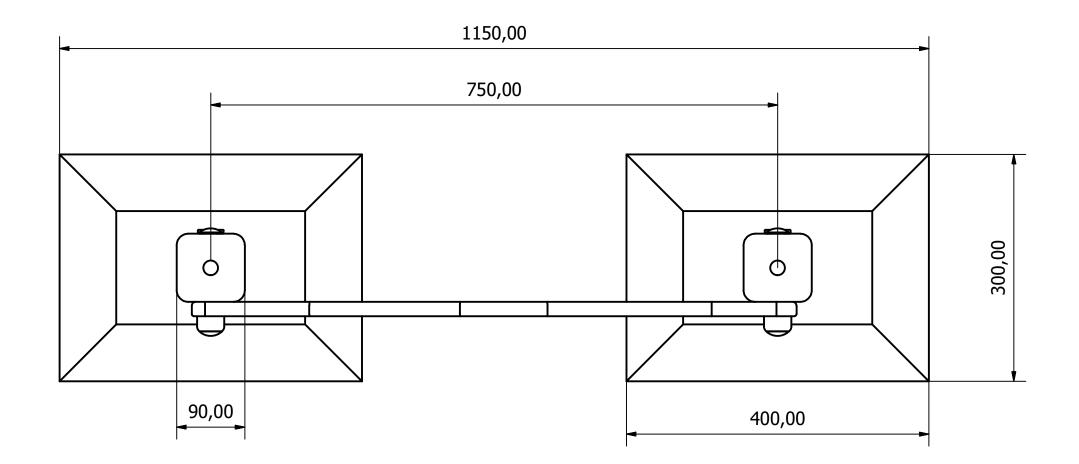

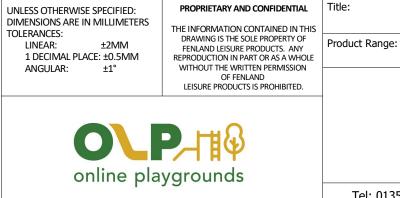


ALL FOUNDATIONS 300 X 400 X 400 DEEP UNLESS OTHERWISE SPECIFIED

PRO-500-078 Range: PLAY PANELS Date: 24/03/2022 Page: DO NOT SCALE FROM DRAWING A3


Tel: 01354 638359 www.onlineplaygrounds.co.uk

NOTE - IF THE UNIT IS DELIVERED FLAT PACK START FROM STEP 1, IF THE IS DELIVERED ASSEMBLED SKIP TO STEP 4.


1. POSITION THE FIRST POST INTO THE FOUNDATION HOLE AS ILLUSTRATED BELOW.

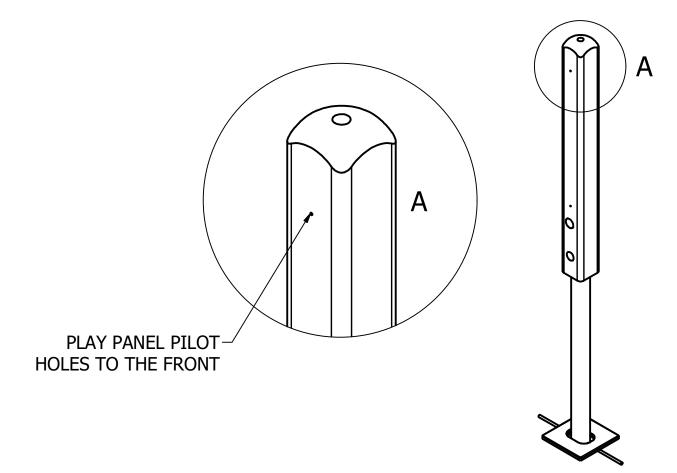

2. POSITION THE SECOND POST INTO THE FOUNDATION HOLE AS ILLUSTRATED BELOW.

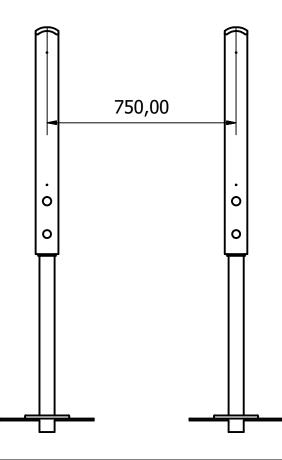

3. USING THE PILOT HOLES ON THE POSTS AS A GUIDE, SECURE THE PLAY PANEL TO THE POSTS USING THE FIXINGS PROVIDED.

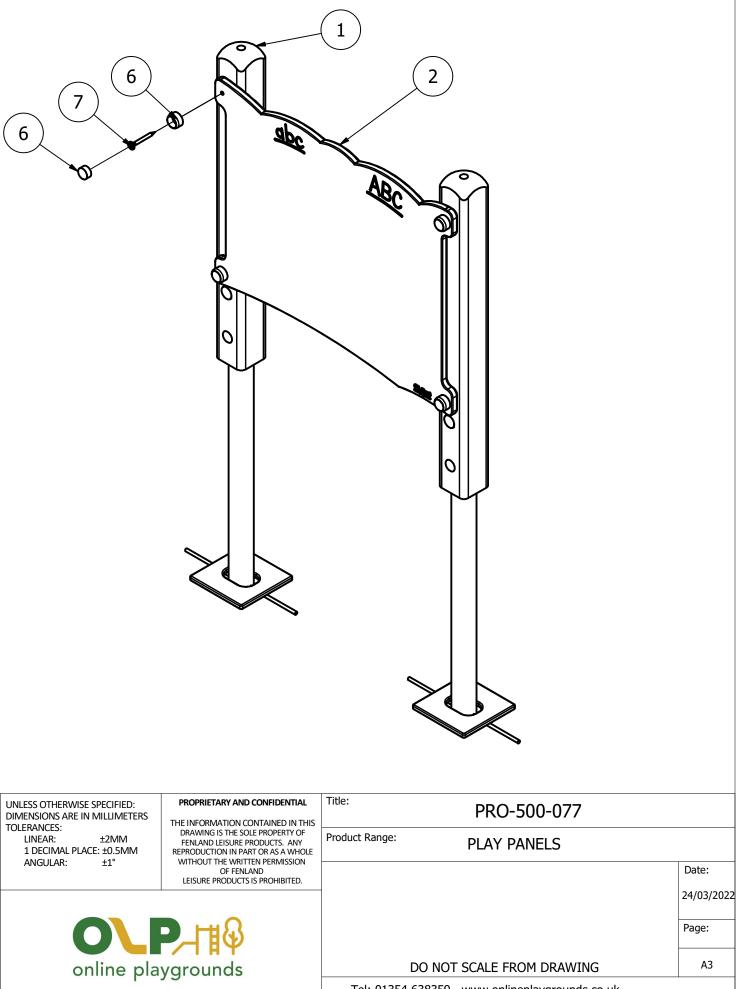

| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS TOLERANCES: LINEAR: ±2MM 1 DECIMAL PLACE: ±0.5MM ANGULAR: ±1° | PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FENLAND LEISURE PRODUCTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FENLAND LEISURE PRODUCTS IS PROHIBITED. | Title: Product | | |
|--|--|-------------------|--|--|
| | | | | |

Tel: 01354 638359 www.onlineplaygrounds.co.uk

4. FINALLY. ENSURE UNIT IS LEVEL AND PLUMB, ALL FIXINGS HAVE BEEN TIGHTENDED AND PROTECTIVE CAPS IN PLACE. ADD CONCRETE TO EACH FOUNDATION HOLE AND LEAVE FOR 48 HOURS.

