

	PARTS LIST				
ITEM	QTY	PART NUMBER	DESCRIPTION	STOCK NUMBER	
1	3	TB-200-348	2150mm x 125mm SAFALOG	COMTIMSAF0001	
2	2	TB-200-517	2300mm x 125mm SAFALOG	COMTIMSAF0001	
3	2	TB-200-518	800mm x 125mm SAFALOG	COMTIMSAF0001	
4	1	TB-200-519	1800mm x 125mm SAFALOG	COMTIMSAF0001	
5	1	MOD-600-010 - LINK DUAL ROPE	LINK DUAL ROPE		
6	6	M12 X 240 COACH BOLT	M12 x 240 (DIN 603)	COMA2CBM12X240	
7	6	M12 WASHER	M12 WASHER (DIN 125)	COMA2FWM12	
8	6	M12 NYLOC NUT	M12 NYLOC NUT (DIN 985)	COMA2NNM12	
9	6	30MM BOLT COVER	30MM BLACK CAP	COMPLACAP0001	
10	10	GROUND IRON	FOUNDATION GROUND IRON		
11	2	300 x 300 x 400	0.036M ³ CONCRETE FOUNDATION		
12	3	400 x 400 x 500	0.083 CONCRETE FOUNDATION		

	FITNESS INDICATOR SIGN				
ITEM	QTY	PART NUMBER	DESCRIPTION		
1	1	TB-200-399	1650 x 112mm (FC281650P)		
2	1	PE-400-035	COMSIGSIG0032		
3	4	M3 X 25 POZI PAN SCREW	COMHARSTA0009		
4	1	GROUND IRON	FOUNDATION GROUND IRON		
5	1	300 x 300 x 400	0.036M ³ CONCRETE FOUNDATION		

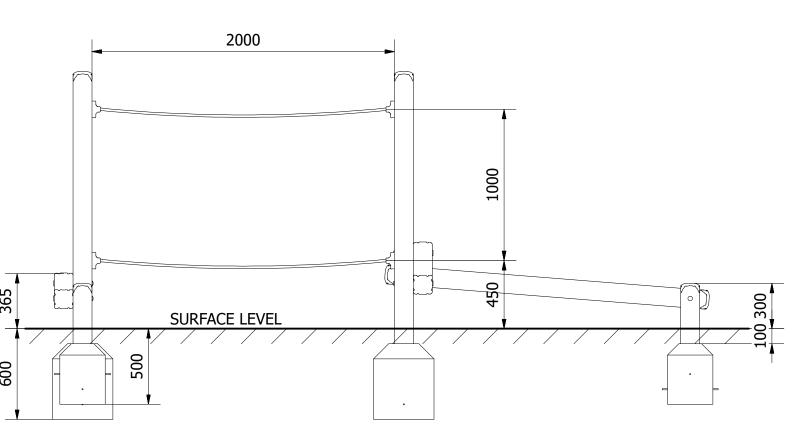

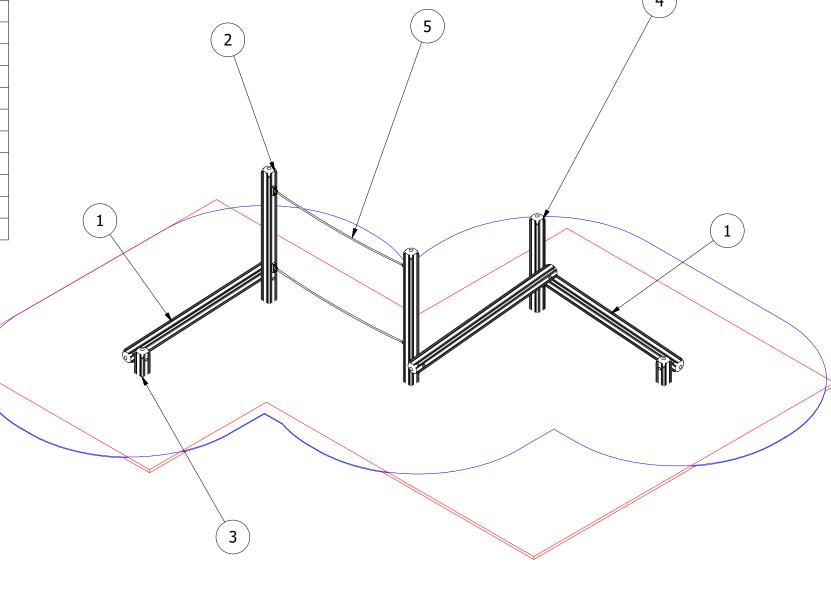

NOTES:

STEELWORK: EXPORT - ALUMINIUM

U.K - STAINLESS STEEL INDICATOR SIGN: EXPORT - COMSIGSIG0042

U.K - COMSIGSIG0032

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS TOLERANCES:

LINEAR: ±2MM 1 DECIMAL PLACE: ±0.5MM ANGULAR: ±1°

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FENLAND LEISURE PRODUCTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FENLAND LEISURE PRODUCTS IS PROHIBITED.

online playgrounds

Title:	PRO-500-107 BALANCE COMBO (AT3)
	PRU-500-107 BALANCE CUMBU (A13)


Product Range: FITNESS TRAIL


Date: < 0.6M FFH 07/05/2019 Page:

А3


DO NOT SCALE FROM DRAWING


Tel: 01354 638359 www.onlineplaygrounds.co.uk

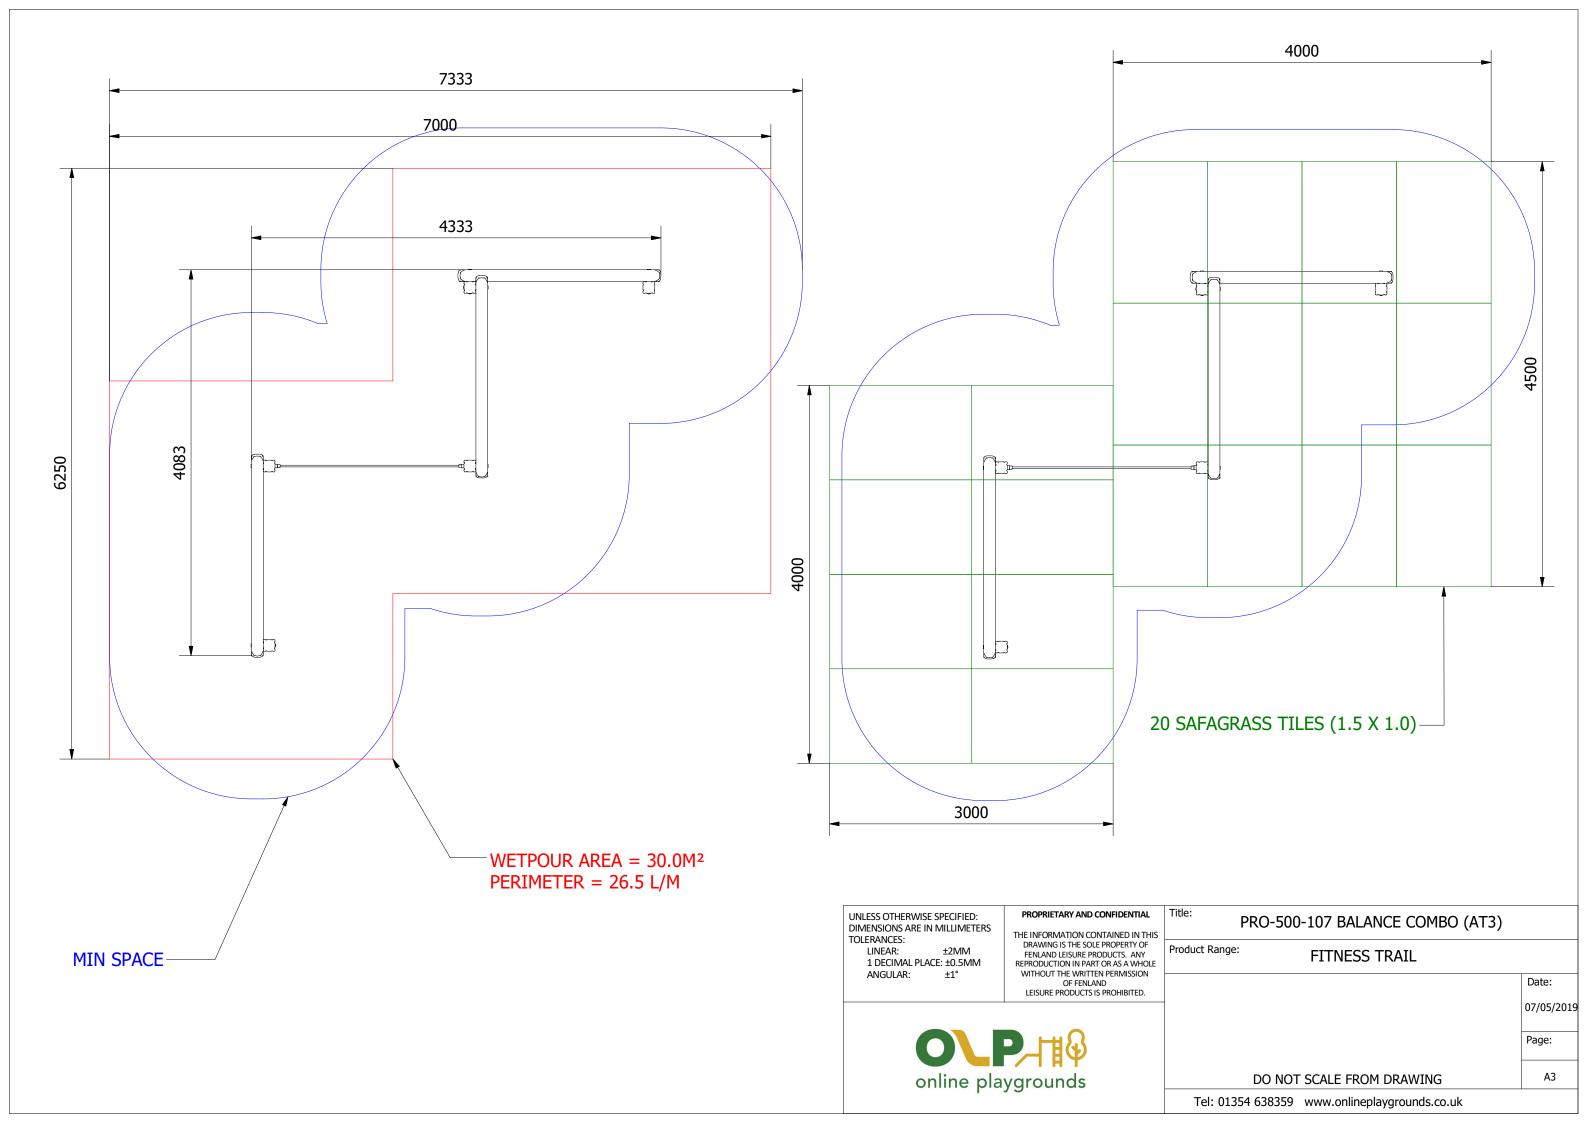

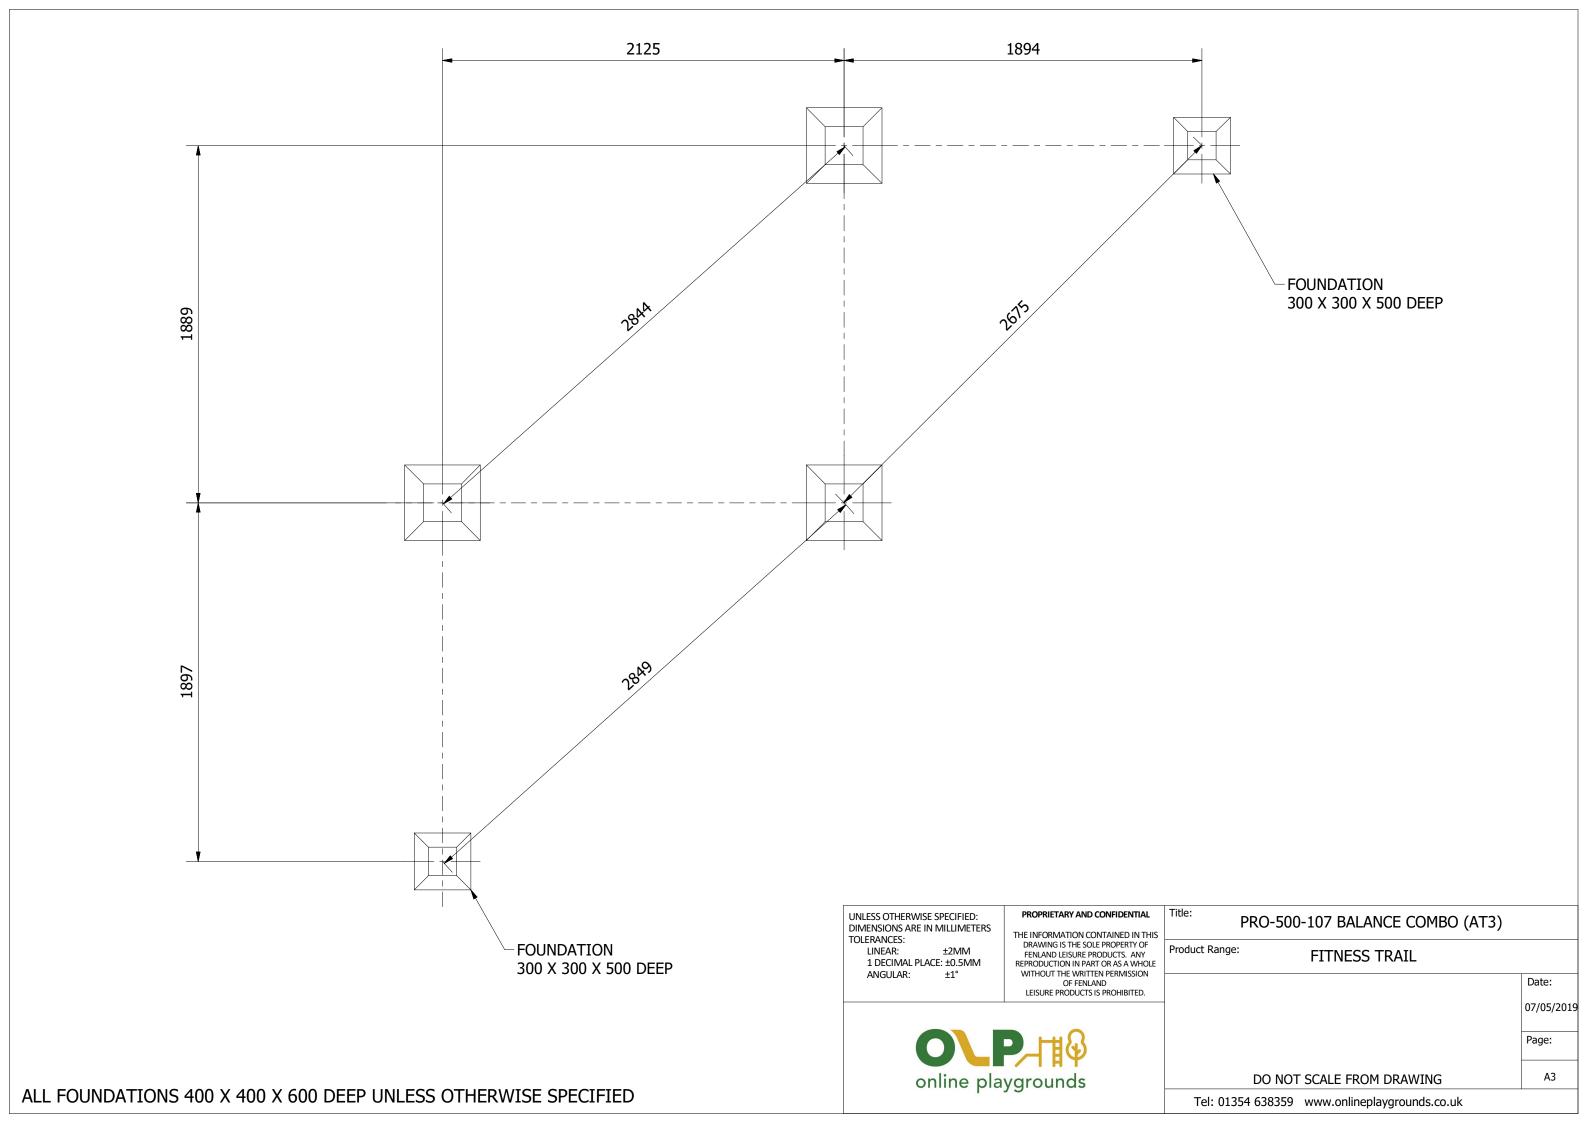

- 1. POSITION THE UPRIGHT POSTS INTO THE FOUNDATION HOLES AS DETAILED ON THE PREVIOUS PAGE AND BRACE IN POSITION.
- 2. JOIN THE POSTS TOGETHER WITH THE BALANCE BEAMS AS DETAILED BELOW USING THE SUPPLIED FIXINGS.

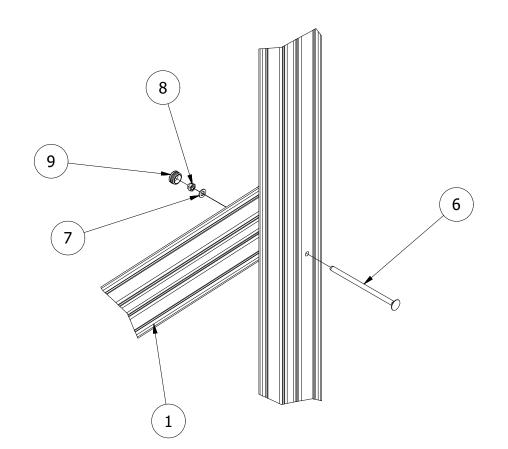

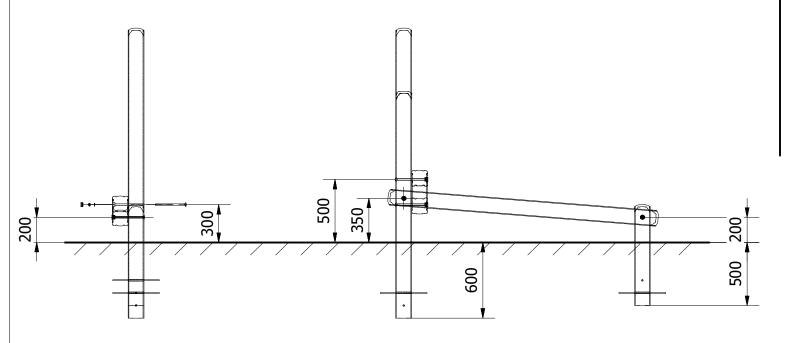

- 3. WITH THE TIMBERS CONNECTED AND BRACED, SECURE THE ROPE BETWEEN THE TWO UPRIGHTS
- 4. FINALLY, ENSURE ALL FIXINGS HAVE BEEN TIGHTENED AND PROTECTIVE CAPS IN PLACE. ADD CONCRETE TO EACH FOUNDATION HOLE AND LEAVE FOR 48 HOURS

