

PARTS LIST				
ITEM	QTY	PART NUMBER	DESCRIPTION	STOCK NUMBER
1	5	TB-200-595	2900 x 125 Safalog	COMTIMSAF0001
2	2	TB-200-596	2900 x 125 Safalog	COMTIMSAF0001
3	1	TB-200-635	2 X 3.65M X 125MM SAFALOG (BONDED)	COMTIMSAF0001
4	1	TB-200-598	2 X 3.425M X 125MM SAFALOG (BONDED)	COMTIMSAF0001
5	1	PE-400-083	SWING LEG COVER	COMHDPEGNBGGN19
6	2	SWC4 FLAT	SWING CHAIN	SUBSWISTR0001
7	2	SWC4 CRADLE	SWING CHAIN	COMSWISTRA0006
8	8	SW29 SWING FITTING	UNIVERSAL SWING FITTING	SUBSW29
9	2	FLAT SWING SEAT	LARGE SWING SEAT	COMSWISEA0001
10	2	CRADLE SWING SEAT	SW22 CRADLE SEAT	COMSWISEA0004
12	7	M12 X 180 COACH SCREW	M12 X 180 COACH SCREW	COMA2CSM12X180
13	3	M12 X 220 COACH BOLT	M12 X 220 (DIN 603)	COMA2CBM12X220
14	2	M12 X 240 COACH BOLT	M12 x 240 (DIN 603)	COMA2CBM12X240
15	1	M12 X 430 T-BAR	430MM THREADED BAR	COMHARTHRSTA001
16	22	M12 WASHER	M12 WASHER (DIN 125)	COMA2FWM12
17	15	M12 NYLOC NUT	M12 NYLOC NUT (DIN 985)	COMA2NNM12
18	12	30MM BOLT COVER	30MM BLACK CAP	COMPLACAP0001
19	8	38MM BOLT COVER	38MM CAP	COMPLACAP0016
20	2	2 PART CAP (BLACK)	TWO PART CAP	COMPLACAP0028
21	7	400 x 800 x 400	0.128M³ CONCRETE FOUNDATION	
11	7	MOD-600-121 GROUND FOOT (125)	GROUND FOOT (125)	SUBSTEMIS0006

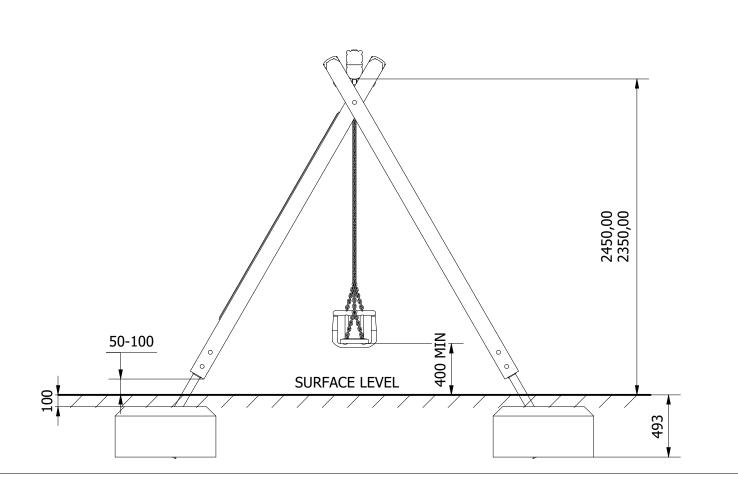

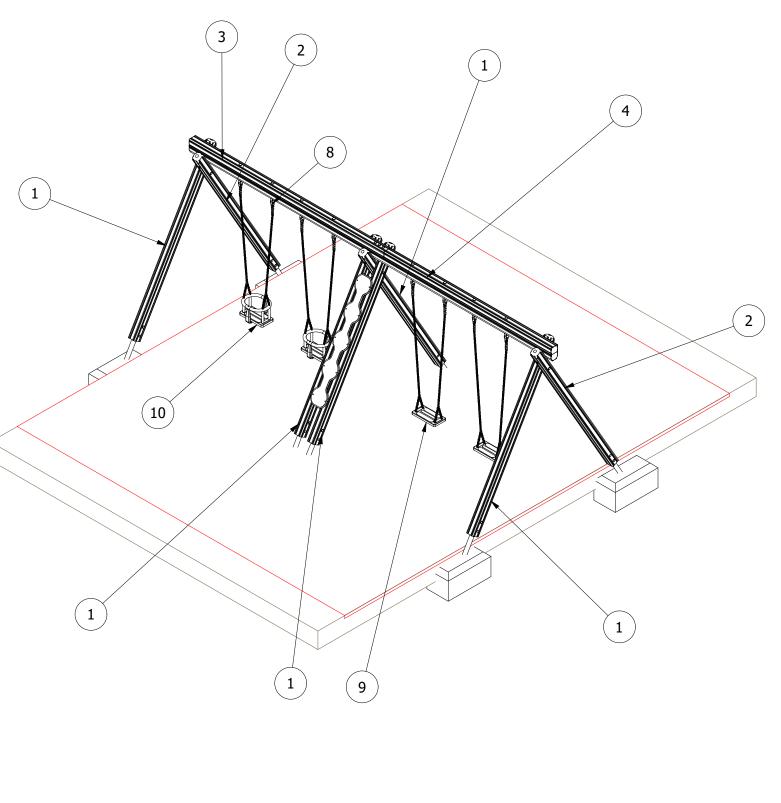

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS TOLERANCES:

LINEAR: ±2MM
1 DECIMAL PLACE: ±0.5MM
ANGULAR: ±1°

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FENLAND LEISURE PRODUCTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FENLAND LEISURE PRODUCTS IS PROHIBITED.



Title:	PRO-500-134 FLAT & CRADLE SEAT SWING
	THO 300 ISTITEM & CHADLE SEAT SWING

Product Range: PLAYGROUND EQUIPMENT

<1.5M FFH


25/10/2019
Page: 1


Date:

А3

Tel: 01354 638359 www.onlineplaygrounds.co.uk


DO NOT SCALE FROM DRAWING

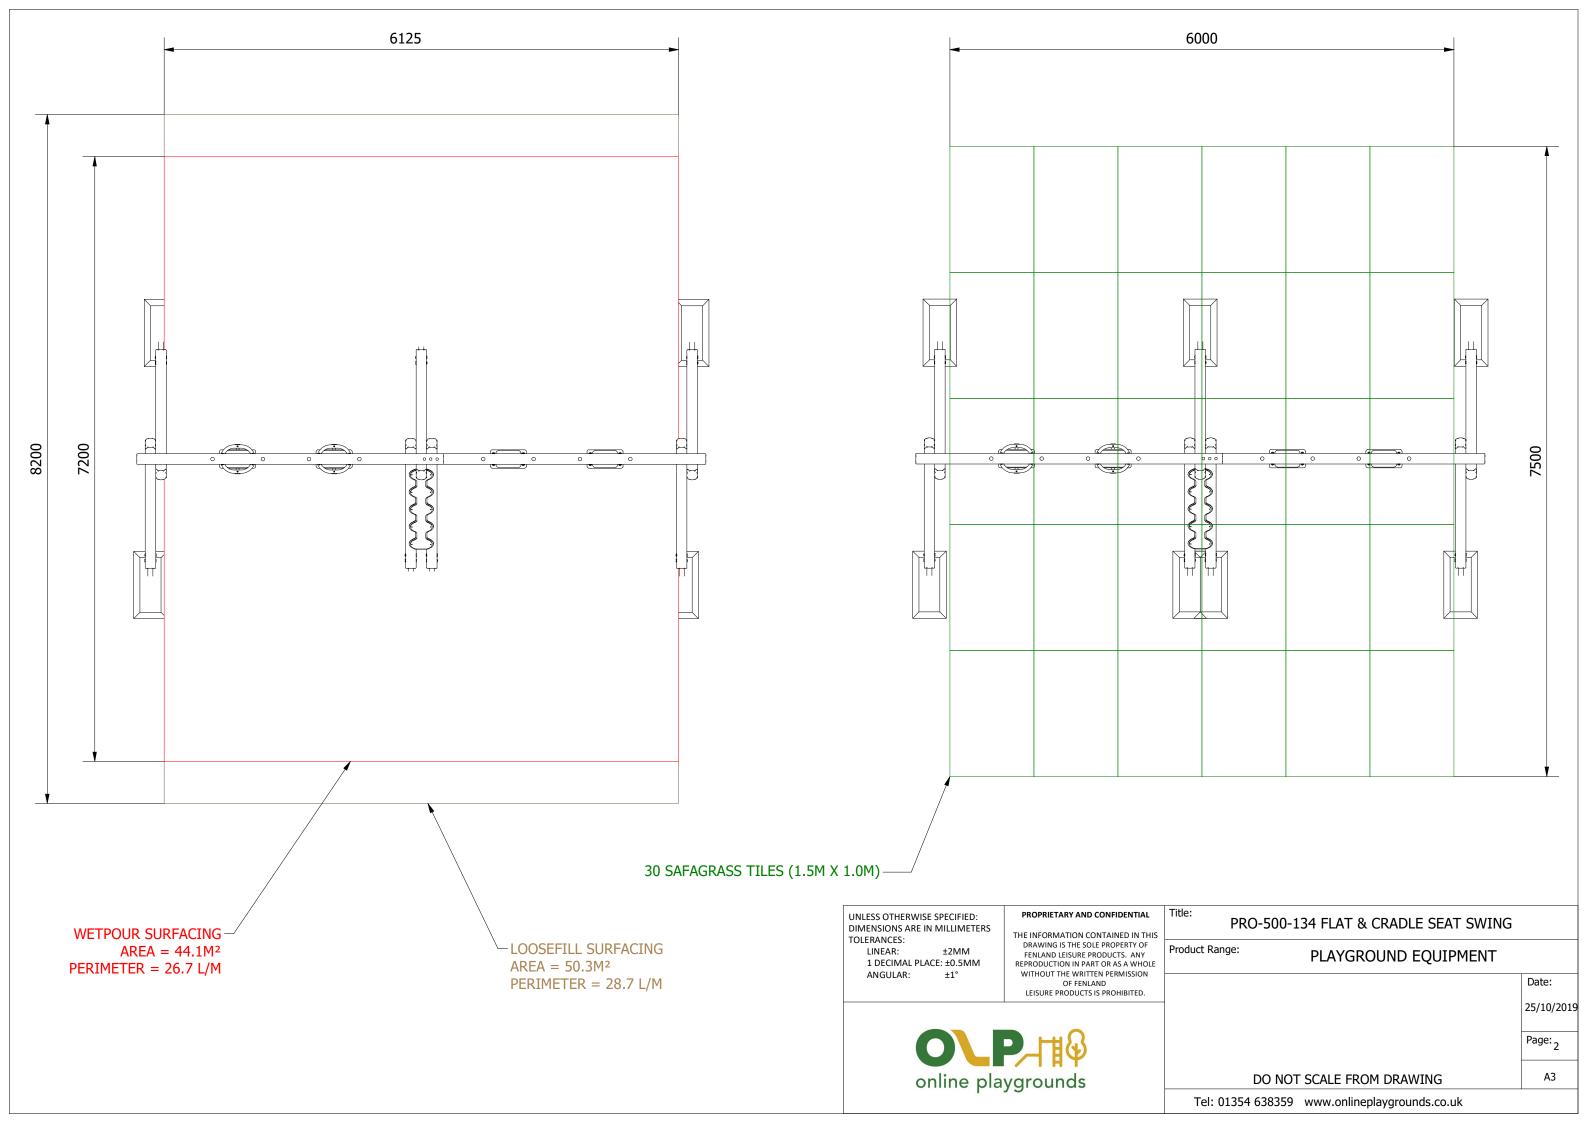

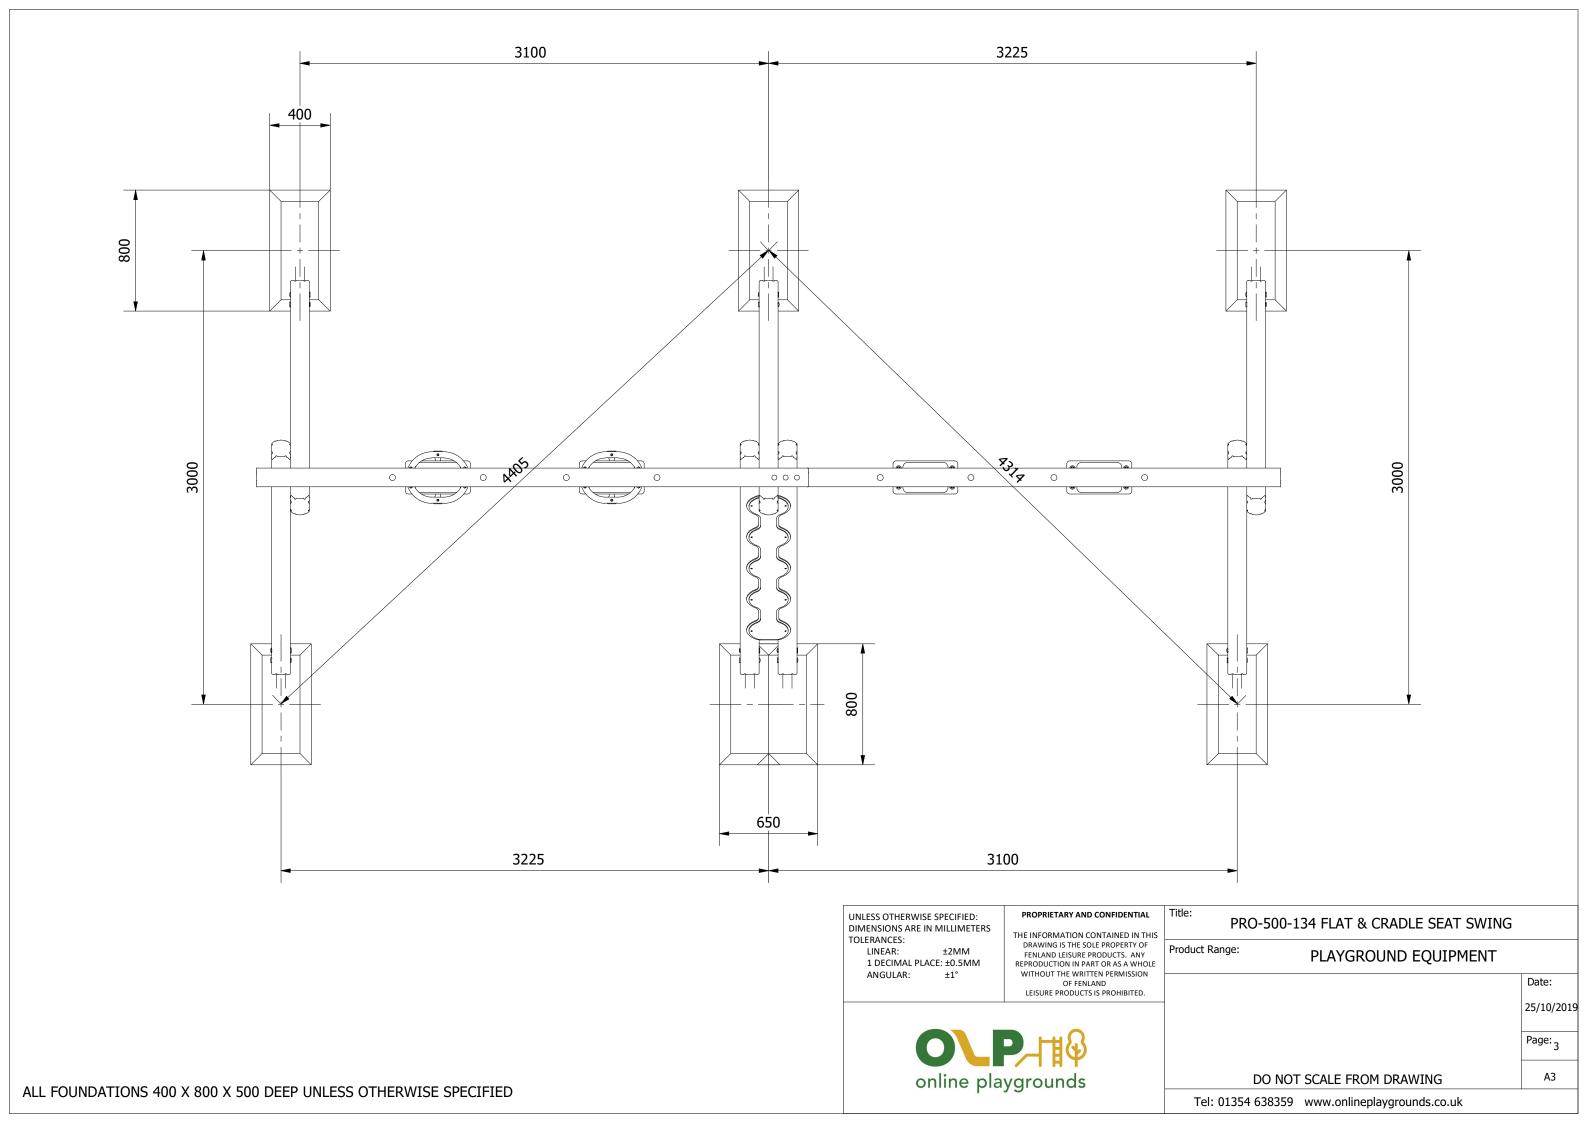


1. CREATE THE TWO SWING A-FRAMES USING THE SUPPLIED FIXINGS AS ILLUSTRATED BELOW.

NOTE: TO REDUCE THE RISK OF STEEL GALLING, USE LUBRICANT ON ALL STAINLESS STEEL FIXINGS

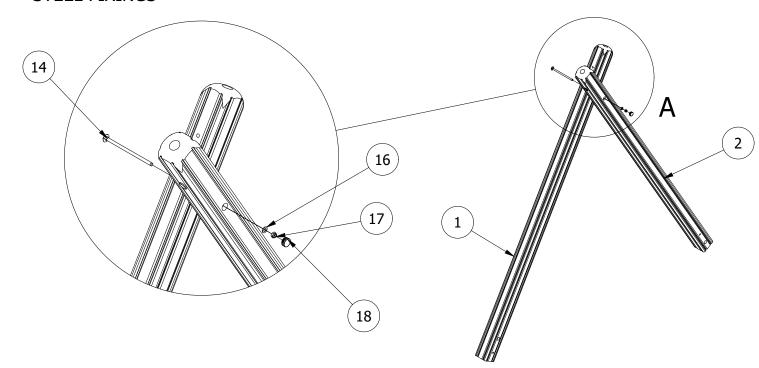


2. POSITION THE A-FRAMES INTO THE FOUNDATION HOLES AND BRACE. (TAKE NOTE OF THE POSITION OF THE POSTS AS SHOWN IN FIG 1) POSITION THE TOP BAR ONTO THE A-FRAMES AND SECURE IN PLACE.

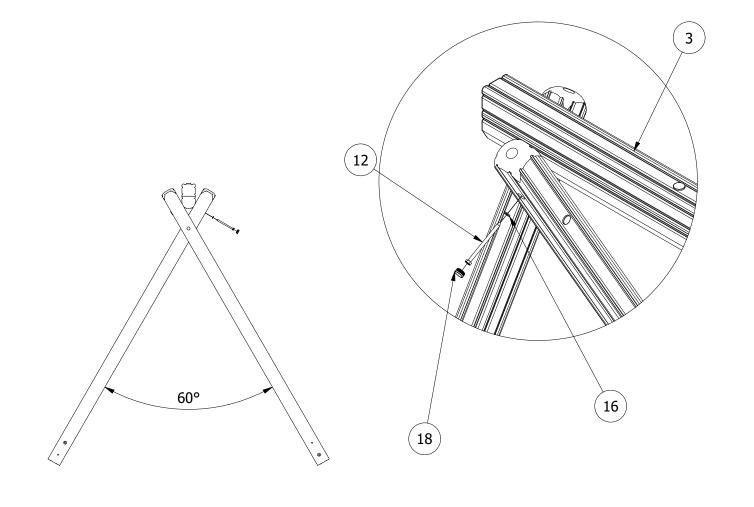

3. AS ILLUSTRATED BELOW, THE TOP CROSSBAR IS SUPPLIED IN TWO PARTS. SECURE THE TWO PARTS TOGETHER AND ATTACH BOTH END A-FRAMES.

FOR THE CENTRAL SUPPORT A-FRAME, USE THE BELOW ILLUSTRATION TO BUILD THE CENTRAL SECTION, POSITION IN PLACE AND SECURE TO THE TOP BEAM.

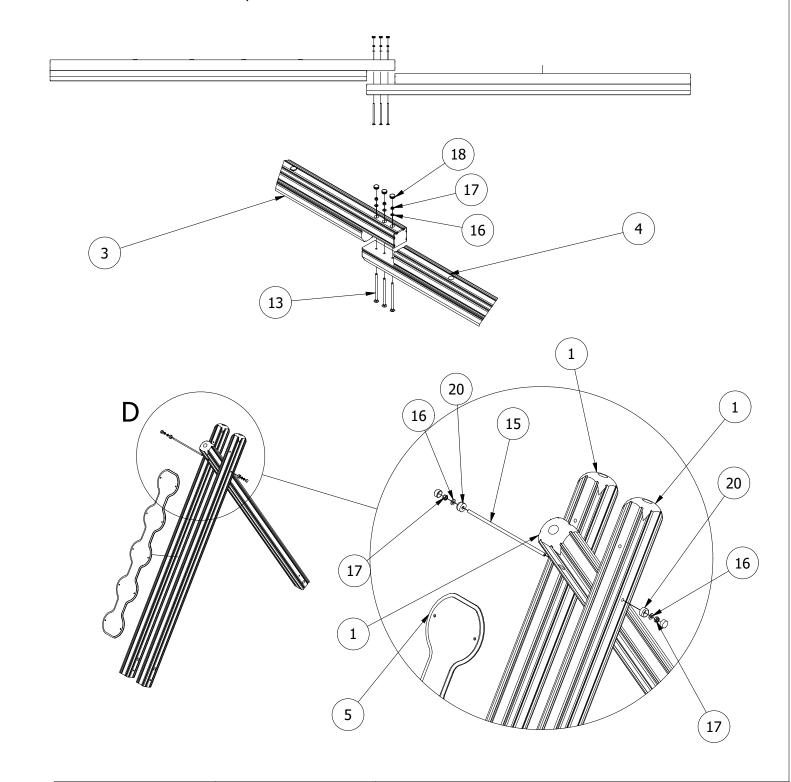

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
LINEAR: ±2MM
1 DECIMAL PLACE: ±0.5MM
ANGULAR: ±1°

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS

DRAWING IS THE SOLE PROPERTY OF

DRAWING IS THE SOLE PROPERTY OF
FENLAND LEISURE PRODUCTS. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION
OF FENLAND
LEISURE PRODUCTS IS PROHIBITED.



Title: PRO-500-134 FLAT & CRADLE SEAT SWING

Product Range: PLAYGROUND EQUIPMENT


DO NOT SCALE FROM DRAWING

25/10/2019


Page: 4

Tel: 01354 638359 www.onlineplaygrounds.co.uk

4. AS ILLUSTRATED, SECURE THE SWING HANGER AND THE SECURITY HANGER TO THE UNDERSIDE OF THE TOP BAR (ENSURE THE SECURITY SAFETY HANGER IS SECURED ON THE OUTER SIDE)

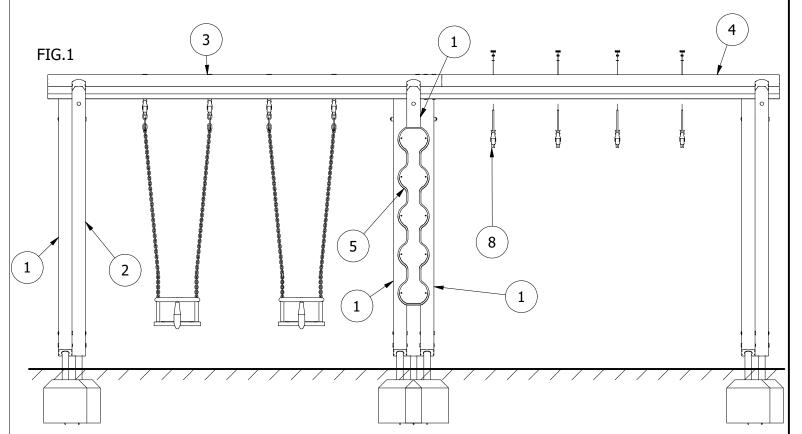

5. HANG THE BIRDS NEST SWING ATTACHING THE SWING CHAIN TO THE SWING HANGERS AND THE SECURITY CHAIN TO THE SWING CHAIN. ENSURE THE SEAT SITS A MINIMUM OF 400MM FROM FINISHED SURFACE LEVEL TO UNDERSIDE OF THE BASKET SEAT/SWING SEATS.

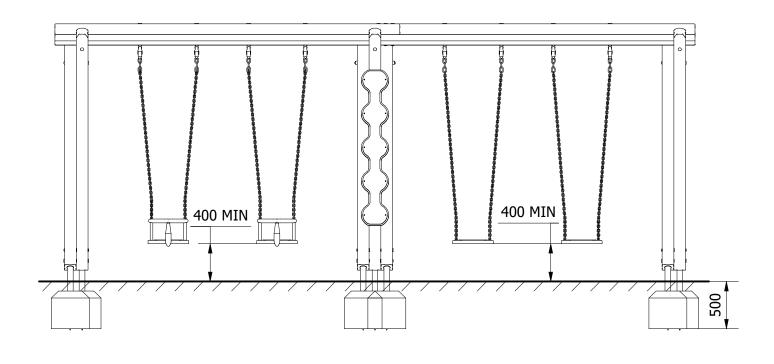

- 6. ALL POSTS WILL BE SUPPLIED WITH THE GROUND FOOT PRE-ATTACHED. IF NOT, PLEASE SEE THE DETAIL BELOW ON SECURING THE FOOT TO THE UNDERIDE OF THE UPRIGHT POSTS.
- 7. FINALLY, ENSURE UNIT IS LEVEL AND PLUMB, ALL FIXINGS HAVE BEEN TIGHTENED AND PROTECTIVE CAPS IN PLACE. ADD CONCRETE TO EACH FOUNDATION HOLE AND LEAVE FOR 48 HOURS

