

PARTS LIST					
ITEM	QTY	PART NUMBER	DESCRIPTION	STOCK NUMBER	
1	5	TB-200-325	4800mm x 125mm SAFALOG	COMTIMSAF0001	
2	3	TB-200-324	4200mm x 125mm SAFALOG	COMTIMSAF0001	
3	3	TB-200-326	4200mm x 125mm SAFALOG	COMTIMSAF0001	
4	3	TB-200-327	4050mm x 125mm SAFALOG	COMTIMSAF0001	
5	10	RS-100-039	36MM POLYHEMP ROPE		
6	15	M12 X 220 COACH BOLT	M12 X 220 (DIN 603)	COMA2CBM12X220	
7	15	M12 WASHER	M12 WASHER (DIN 125)	COMA2FWM12	
8	15	M12 NYLOC NUT	M12 NYLOC NUT (DIN 985)	COMA2NNM12	
9	10	M16 WASHER	M16 WASHER (DIN 125)	COMA2FWM16	
10	10	M16 NYLOC NUT	M16 NYLOC NUT (DIN 985)	COMA2NNM16	
13	18	GROUND IRON	FOUNDATION GROUND IRON		
11	15	30MM BOLT COVER	30MM BLACK CAP	COMPLACAP0001	
14	9	400 x 400 x 700	0.1123 CONCRETE FOUNDATION		
15	10	200 x 200 x 400	0.016 <sup>3</sup> CONCRETE FOUNDATION		
12	10	45MM BOLT COVER	45MM CAP	COMPLACAP0017	

INDICATOR SIGN					
ITEM	QTY	PART NUMBER	DESCRIPTION		
1	1	TB-200-399	1650 x 112mm (FC281650P)		
2	1	PE-400-035	COMSIGSIG0032		
3	4	M3 X 25 POZI PAN SCREW	COMHARSTA0009		
4	1	GROUND IRON	FOUNDATION GROUND IRON		
5	1	300 x 300 x 400	0.036M <sup>3</sup> CONCRETE FOUNDATION		

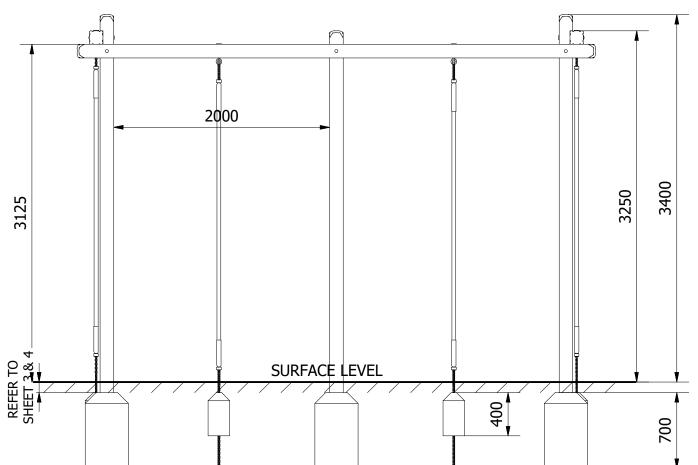

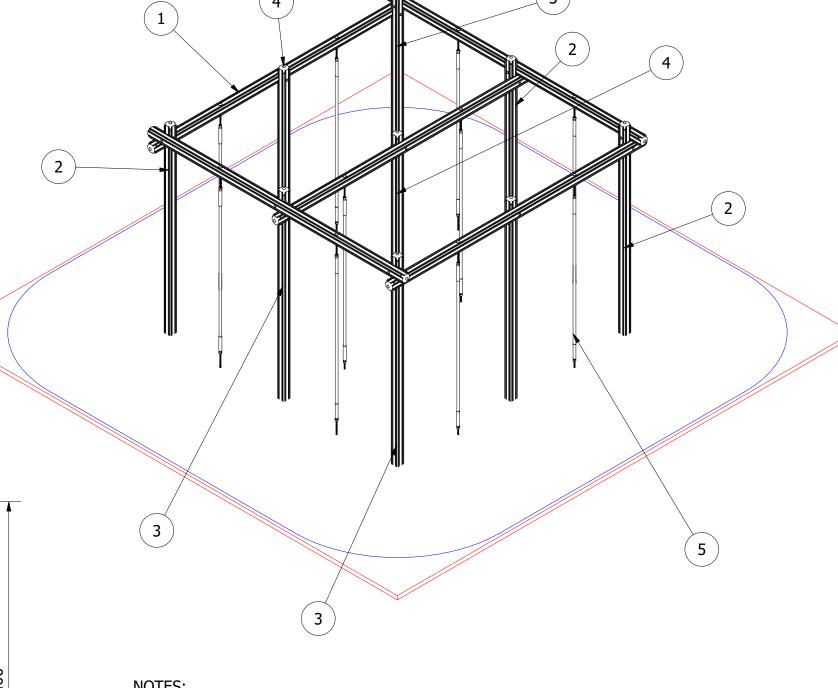

NOTES:

EXPORT - ALUMINIUM STEELWORK:

**U.K - STAINLESS STEEL** 

INDICATOR SIGN: EXPORT - COMSIGSIG0042 U.K - COMSIGSIG0032

online playgrounds

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS TOLERANCES:

LINEAR: ±2MM 1 DECIMAL PLACE: ±0.5MM ANGULAR: ±1°

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FENLAND LEISURE PRODUCTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FENLAND LEISURE PRODUCTS IS PROHIBITED.

OLP\_III

PRO-500-045 GROUP ROPE CLIMB (GP2)

Product Range: FITNESS TRAIL

<2.2M FFH

Date:


Page:


01/05/2019


А3

DO NOT SCALE FROM DRAWING

Tel: 01354 638359 www.onlineplaygrounds.co.uk

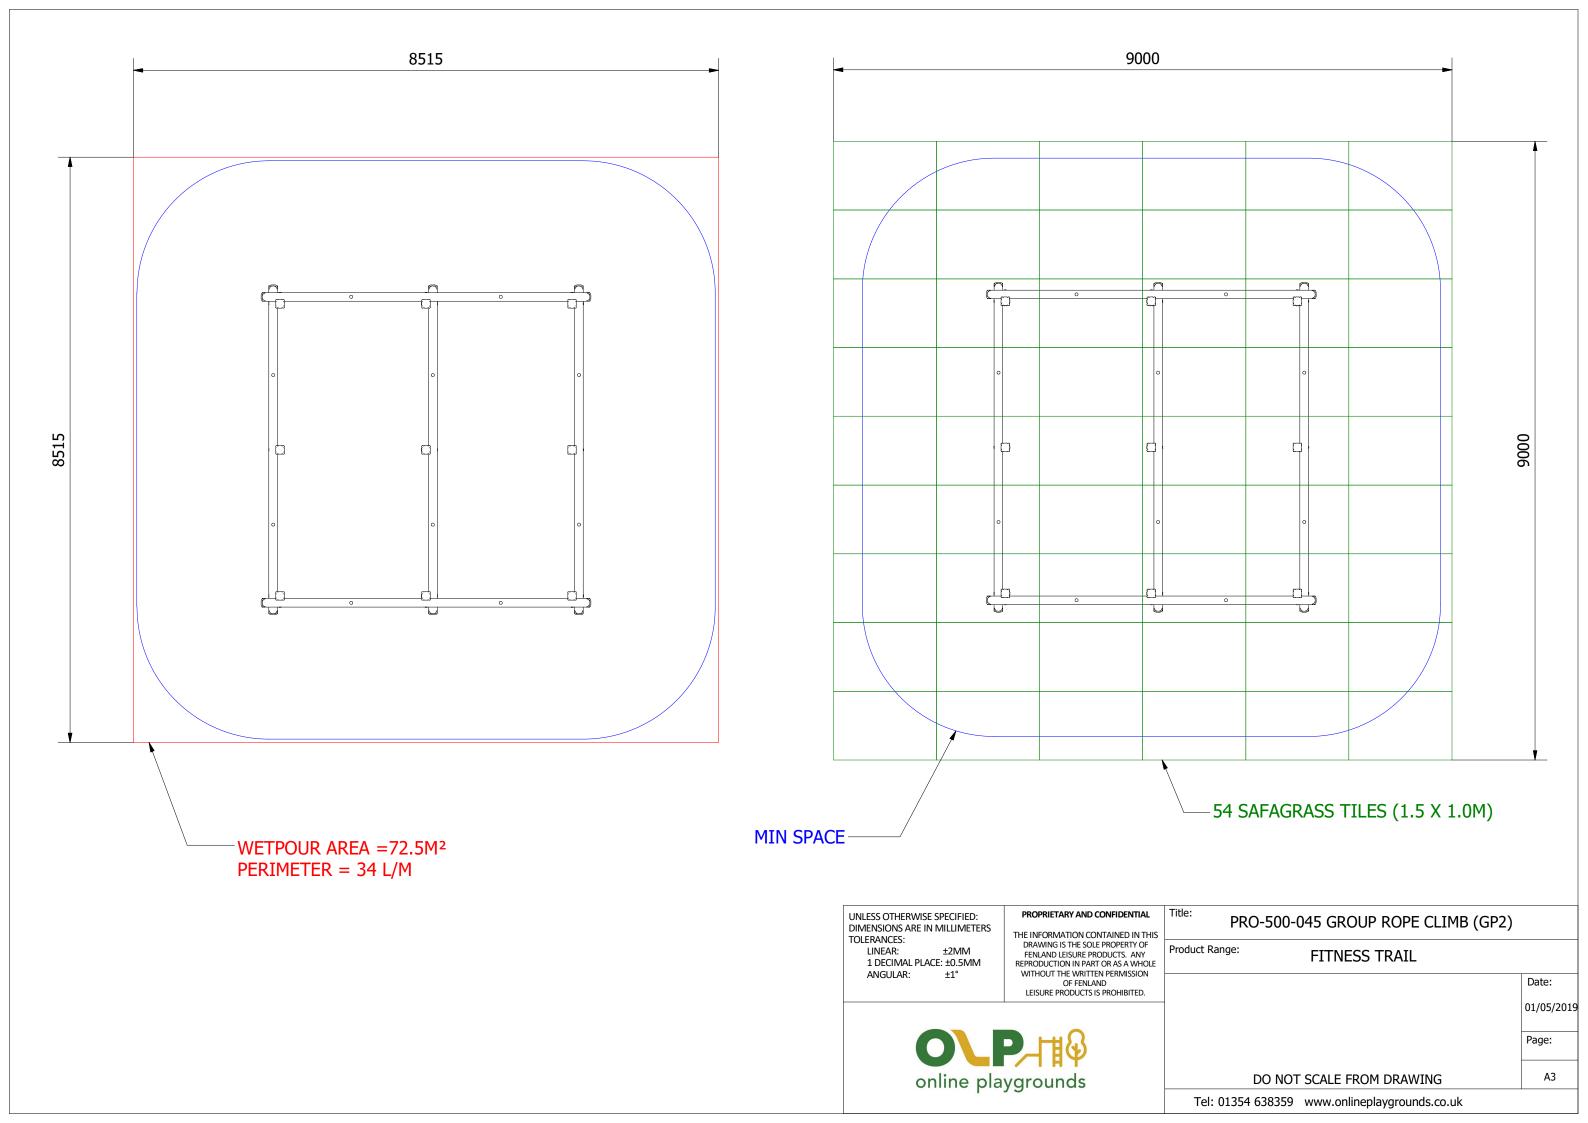


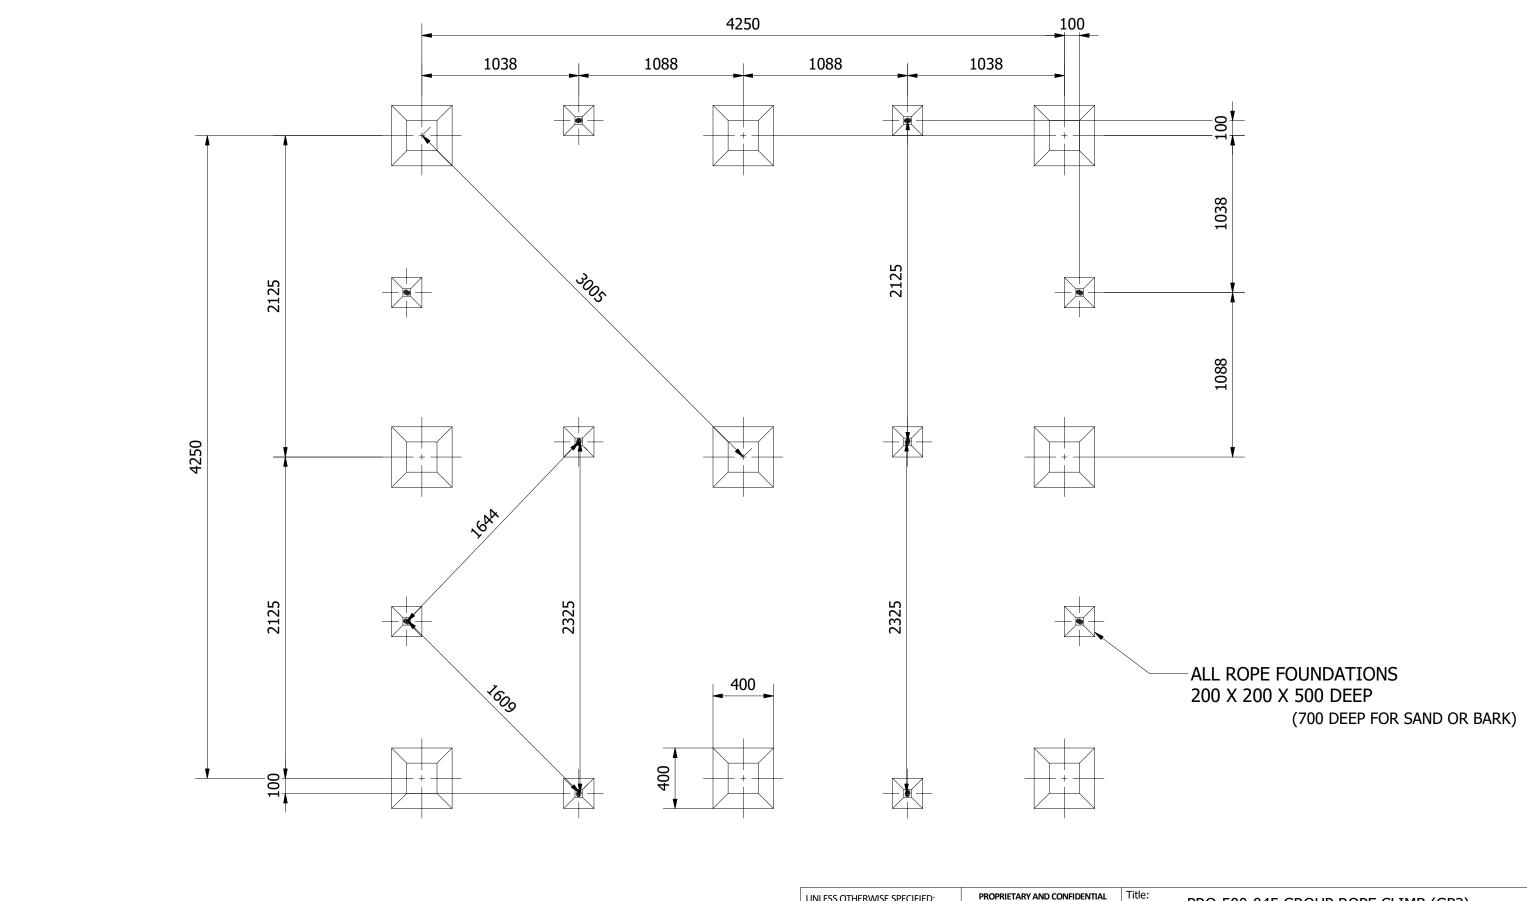

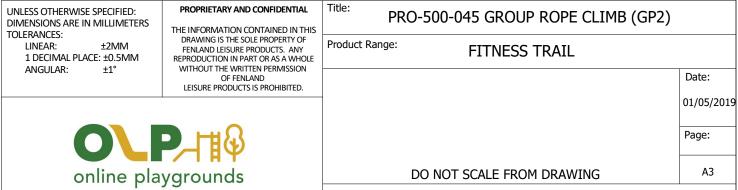


Tel: 01354 638359 www.onlineplaygrounds.co.uk


1. POSITION AND BRACE THE UPRIGHT POSTS INTO THE FOUNDATION HOLES. AS SHOWN BELOW, SECURE THE CROSSBEAMS TO THE UPRIGHT POSTS USING THE SUPPLIED COACH BOLTS.

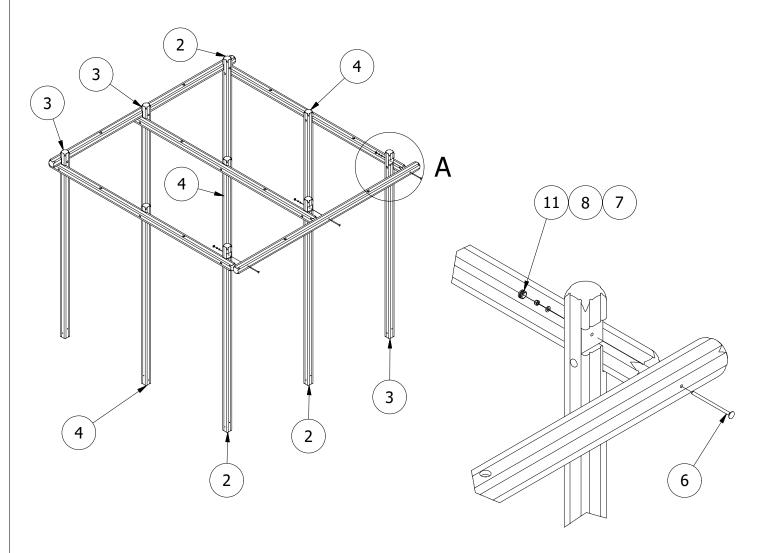

2. WITH THE FRAME ERECTED, SECURE THE ROPES TO THE CROSSBEAM WITH THE LONG CHAIN IN THE FOUNDATION HOLE.

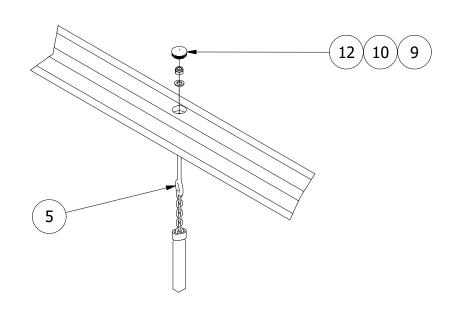

3. FINALLY, ENSURE THE UNIT IS LEVEL AND PLUMB, ALL FIXINGS HAVE BEEN TIGHTENED AND PROTECTIVE CAPS IN PLACE. ADD CONCRETE TO EACH FOUNDATION HOLE AND LEAVE FOR 48 HOURS

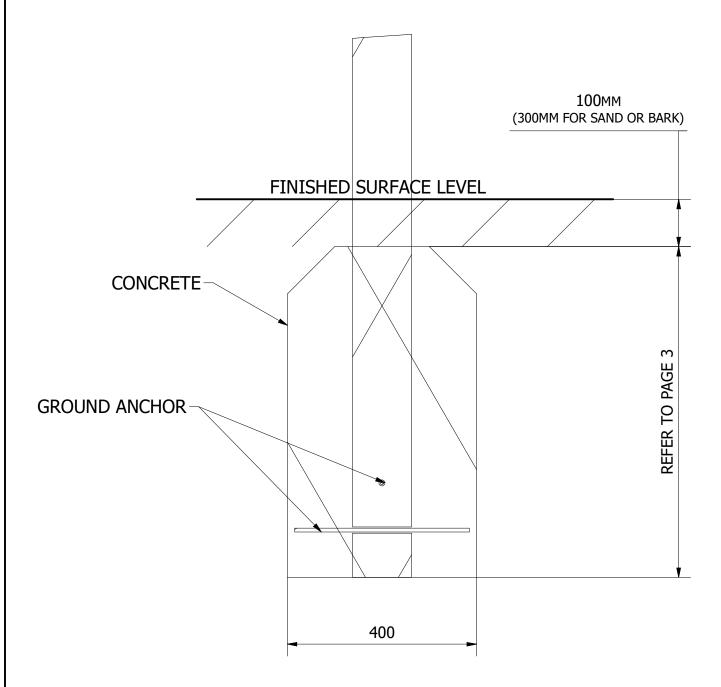

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS PROPRIETARY AND CONFIDENTIAL PRO-500-045 GROUP ROPE CLIMB (GP2) THE INFORMATION CONTAINED IN THIS TOLERANCES: DRAWING IS THE SOLE PROPERTY OF Product Range: FENLAND LEISURE PRODUCTS. ANY REPRODUCTION IN PART OR AS A WHOLE FITNESS TRAIL 1 DECIMAL PLACE: ±0.5MM ANGULAR: WITHOUT THE WRITTEN PERMISSION OF FENLAND LEISURE PRODUCTS IS PROHIBITED 01/05/2019 Page: А3 online playgrounds DO NOT SCALE FROM DRAWING Tel: 01354 638359 www.onlineplaygrounds.co.uk