
PARTS LIST					
ITEM	QTY	PART NUMBER	DESCRIPTION	STOCK NUMBER	
1	4	ТВ-200-353_В	575MM X 125MM (POST INSERT)	COMTIMSAF0001	
2	7	TB-200-354	2800mm x 125mm SAFALOG	COMTIMSAF0001	
3	4	ТВ-200-355_В	925MM X 125MM (POST INSERT)	COMTIMSAF0001	
4	4	ТВ-200-356_В	1275MM X 125M (POST INSERT)	COMTIMSAF0001	
5	4	M12 X 220 COACH BOLT	M12 X 220 (DIN 603)	COMA2CBM12X220	
6	10	M12 X 320 T-BAR	320MM THREADED BAR	COMHARTHRSTA001	
7	24	M12 NYLOC NUT	M12 NYLOC NUT (DIN 985)	COMA2NNM12	
8	24	M12 WASHER	M12 WASHER (DIN 125)	COMA2FWM12	
9	24	30MM BOLT COVER	30MM BLACK CAP	COMPLACAP0001	
10	2	400 x 1200 x 300	0.168M <sup>3</sup> CONCRETE FOUNDATION		
11	12	MOD-600-121 GROUND FOOT (125)	GROUND FOOT (125)	SUBSTEMIS0006	

	INDICATOR SIGN						
ITEM	QTY	PART NUMBER	DESCRIPTION	STOCK NUMBER			
1	1	ТВ-200-399_В	1100 x 112mm (FC281650P)	COMTIMSAF0002			
2	1	PE-400-035	INDICATOR SIGN	COMSIGSIG0032			
3	1	MOD-600-116 GROUND FOOT	GROUND FOOT (112)	SUBSTEMIS0004			
4	4	M3 X 25 POZI PAN SCREW	25MM POZI PAN SCREW	COMHARSTA0009			
5	1	300 x 300 x 400	0.036M <sup>3</sup> CONCRETE FOUNDATION				

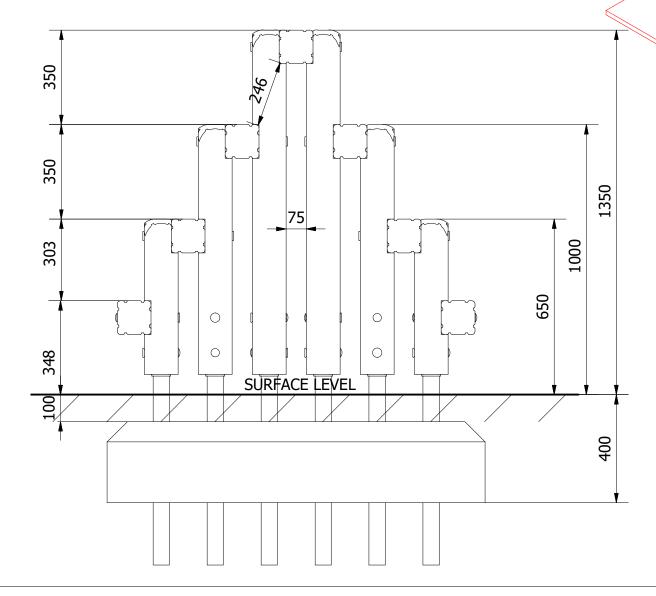

NOTES: STEELWORK:

3


4


STEELWORK: EXPORT - ALUMINIUM U.K - STAINLESS STEEL INDICATOR SIGN: EXPORT - COMSIGSIG0042 U.K - COMSIGSIG0032

2

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS TOLERANCES: LINEAR: ±2MM 1 DECIMAL PLACE: ±0.5MM ANGULAR: ±1°	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FENLAND LEISURE PRODUCTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FENLAND LEISURE PRODUCTS IS PROHIBITED.	Title: Product <1.4
online playgrounds		


PRO-500-054 LOG STACK (FC7)	
oduct Range: FITNESS TRAIL	
<1.4M FFH	Date:
*******	30/05/2019
	Page: 1
DO NOT SCALE FROM DRAWING	A3
Tel: 01354 638359 www.onlineplaygrounds.co.uk	

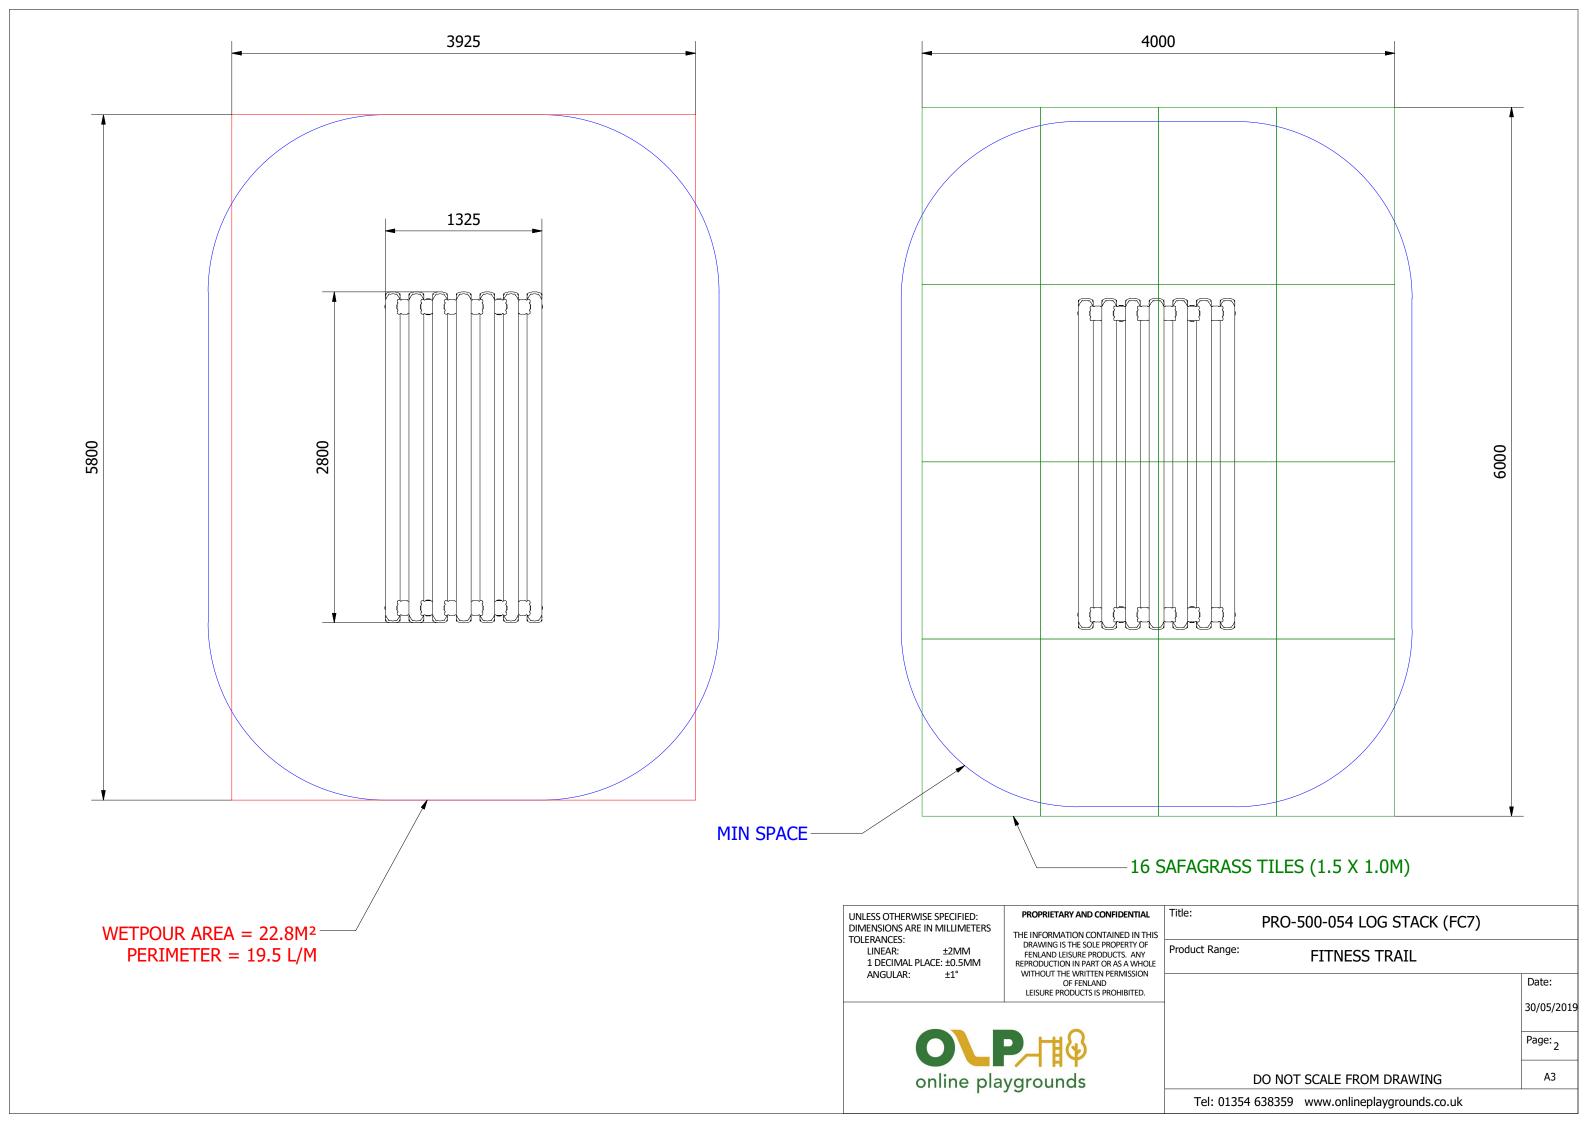

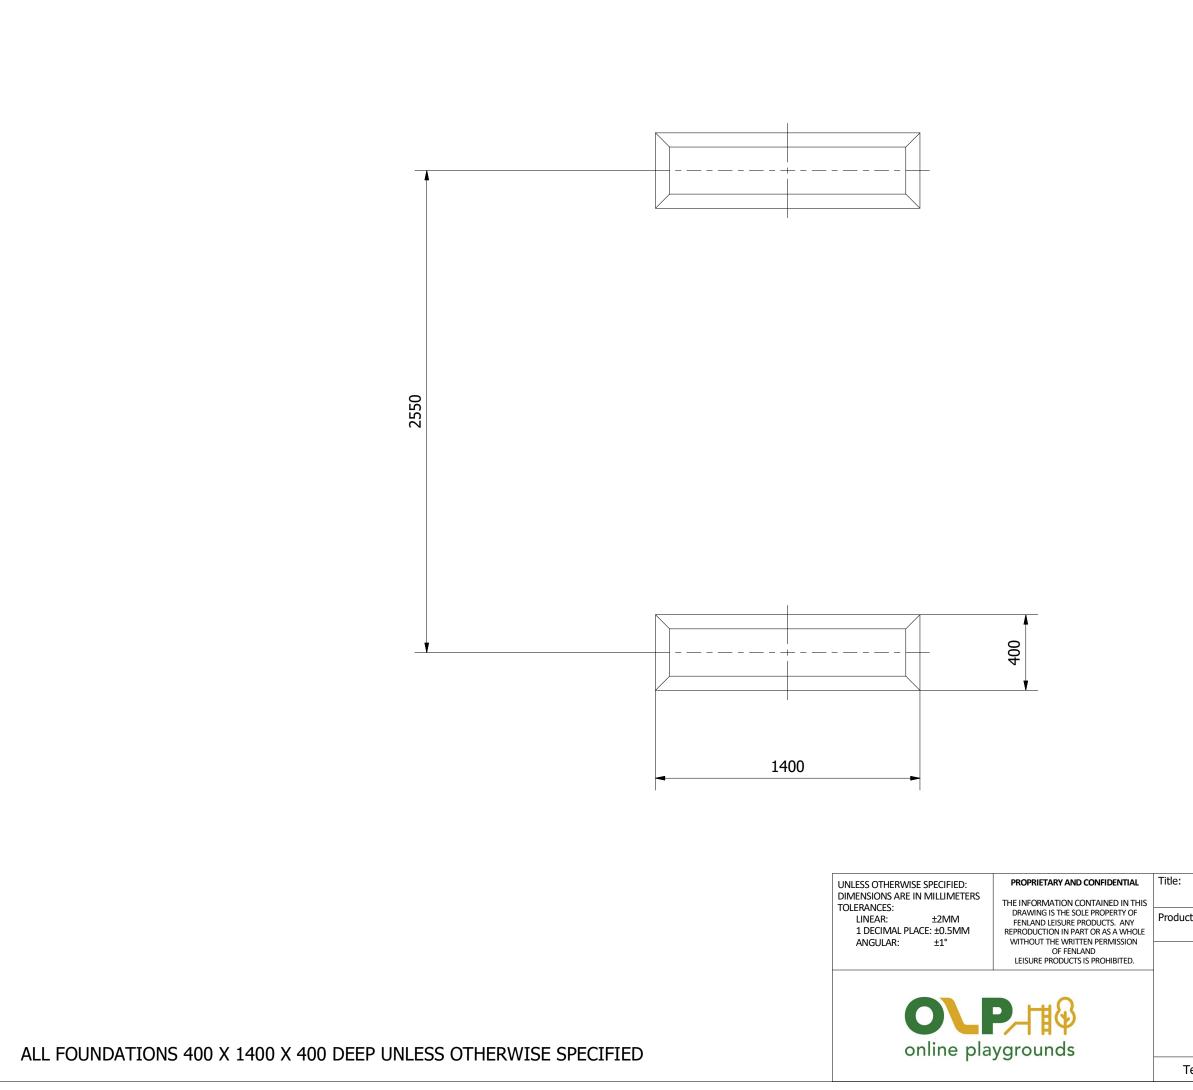


## Title: PRO-500-054 LOG STACK (FC7) Product Range: FITNESS TRAIL Date: 30/05/2019 Page: 3 DO NOT SCALE FROM DRAWING A3 Tel: 01354 638359 www.onlineplaygrounds.co.uk

1. POSITION EACH UPRIGHT POST INTO THE FOUNDATIONS HOLES SHOWN ON THE PREVIOUS PAGE. STARTING WITH THE LOWER ENDS, POSITION THE HORIZONTAL TIMBER INTO THE LOWEST NOTCH AND SECURE USING THE SUPPLIED COACH BOLT.

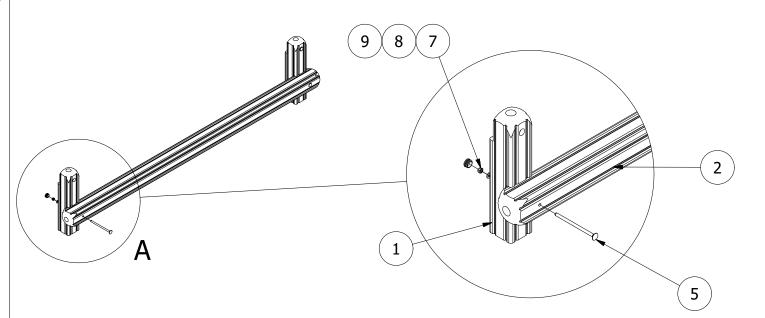


2. AS ILLUSTRATED BELOW, POSITION THE HORIZONTAL TIMBERS (ITEM 2), INTO THE CORRESPONDING REBATES IN THE UPRIGHT TIMBERS AND SECURE USING THE SUPPLIED THREADED BAR.

Note: Take extreme care with stainless steel fixings: preferably using lubricant before securing with a nyloc nut.

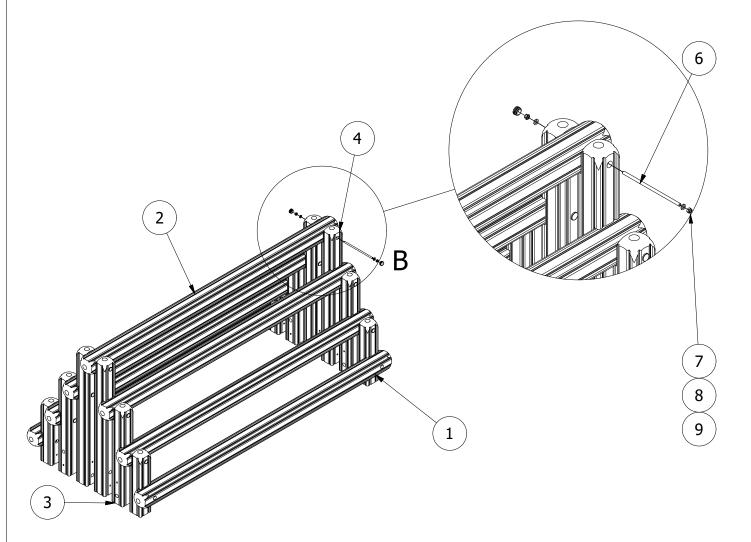

3. FINALLY, ENSURE UNIT IS LEVEL AND PLUMB, ALL FIXINGS HAVE BEEN TIGHTENED AND PROTECTIVE CAPS IN PLACE. ADD CONCRETE TO EACH FOUNDATION HOLE AND LEAVE FOR 48 HOURS

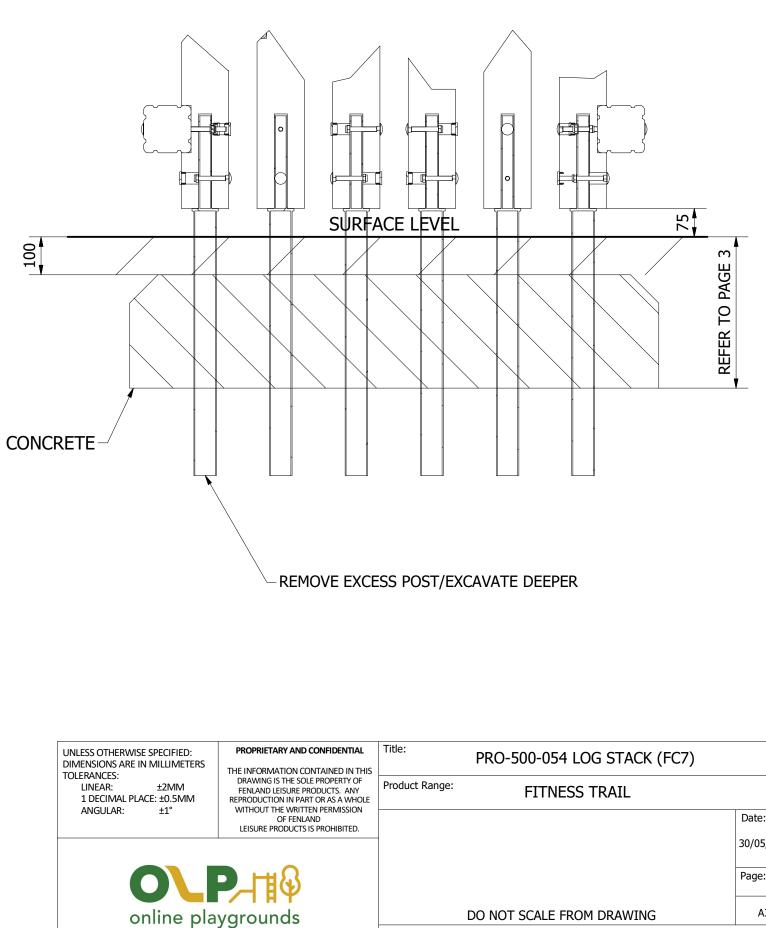

	PRO-500-054 LOG STACK (FC7)	
t Range:	FITNESS TRAIL	
		Date:
		30/05/2019
		Page: 4
	DO NOT SCALE FROM DRAWING	A3

Tel: 01354 638359 www.onlineplaygrounds.co.uk